



## Scottoil: Kawasaki ER5, GPZ500 (87-99) & KLE500 (91-02)

### Installation Guide for ER5, GPZ500 (87-99) & KLE500 (91-02)



Locate the vacuum – **GPZ500 & KLE500** models: there is a spigot in front of the carburetor, as shown below left. Remove the bung and press the Damper Elbow, part number 4, onto the spigot.


**ER5** models: there is a pipe to the fuel tap, as shown in the third picture, cut into this pipe and insert the T-Piece from the Scottoil kit. Then press the Damper Elbow, part number 4, onto the third leg of the tee.



GPZ500 & KLE500

The RMV can be mounted under the seat or behind the number plate. The more vertical the RMV the better and remember to avoid exhaust and engine components.

For further information, see our easy step installation guide – '**RMV Positions, General**'.

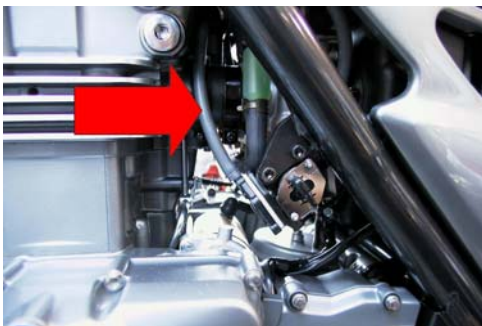

ER5

The Dispenser Assembly, shown bottom left, is routed along the underside of the Swingarm using Dispenser Mounting Sleeves, Cable Ties & Glue. **Note:** an epoxy resin (eg. Araldite) is req'd to bond the sleeves to the Swingarm.


For further information see our easy step installation guide - '**Dispenser Assemblies, General**'.

The nib should feed the sprocket between the 6 & 7 o'clock positions, with the cut face facing outwards.

Once fitted, fill and prime the system and set the adjuster knob to 'prime'.

Start the engine and turn the adjuster knob until a flow of between 1 and 2 drops per minute is achieved.

Check the condition of your chain after a ride, and then adjust as required.

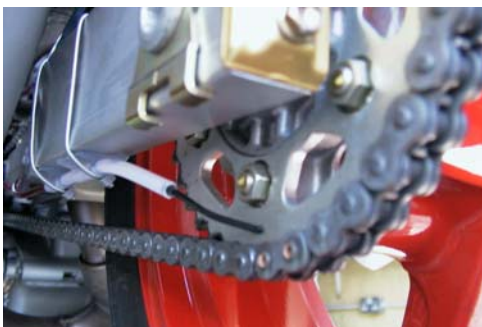

Note: Picture shows a similar Swingarm

If you have any further comments or queries, and are unable to resolve them using our website, please do not hesitate to call technical on 0141 955 1100 or email [technical@scottoiler.com](mailto:technical@scottoiler.com) for assistance. Thank you.

Scottoil Ltd. 2 Riverside, Milngavie, Glasgow, G62 6PL Tel. 0141 955 1100 Fax. 0141 956 5896 [www.scottoiler.com](http://www.scottoiler.com)

