




Scottoil: Kawasaki ZX12R (2000-) Installation Guide for Kawasaki ZX12R (2000-)

Note: The HCR (sold separately) is not compatible with this model, we recommend the Lube Tube instead.



Locate the vacuum – On 2000 to 2002 models there is a bung over a spigot behind the throttle pulleys, shown below left, remove this bung and press the Damper Elbow, part number 4, onto the spigot.

On 2003 – models there is a vacuum pipe, as indicated below, cut into this and insert the T-Piece from the Scottoil kit. Then press the Damper Elbow onto the third leg of the tee.

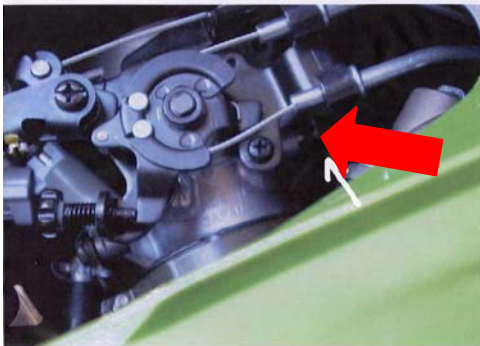

The RMV can be mounted under the seat or behind the number plate. The more vertical the RMV the better and remember to avoid exhaust and engine components.

For further information, see our easy step installation guide – '**RMV Positions, General**'.

The Dispenser Assembly, shown left, is routed along the Swingarm and secured to the spindle using a Dispenser Plate, part numbers 19 & 20.

The nib should feed the sprocket between the 6 & 7 o'clock positions, with the cut face facing outwards, as shown bottom left.

Once fitted, fill and prime the system and set the adjuster knob to 'prime'.

Start the engine and turn the adjuster knob until a flow of between 1 and 2 drops per minute is achieved.

Check the condition of your chain after a ride, and then adjust as required.



Note: This is a generic image

If you have any further comments or queries, and are unable to resolve them using our website, please do not hesitate to call technical on 0141 955 1100 or email technical@scottoiler.com for assistance. Thank you.

Scottoil Ltd. 2 Riverside, Milngavie, Glasgow, G62 6PL Tel. 0141 955 1100 Fax. 0141 956 5896 www.scottoiler.com

